


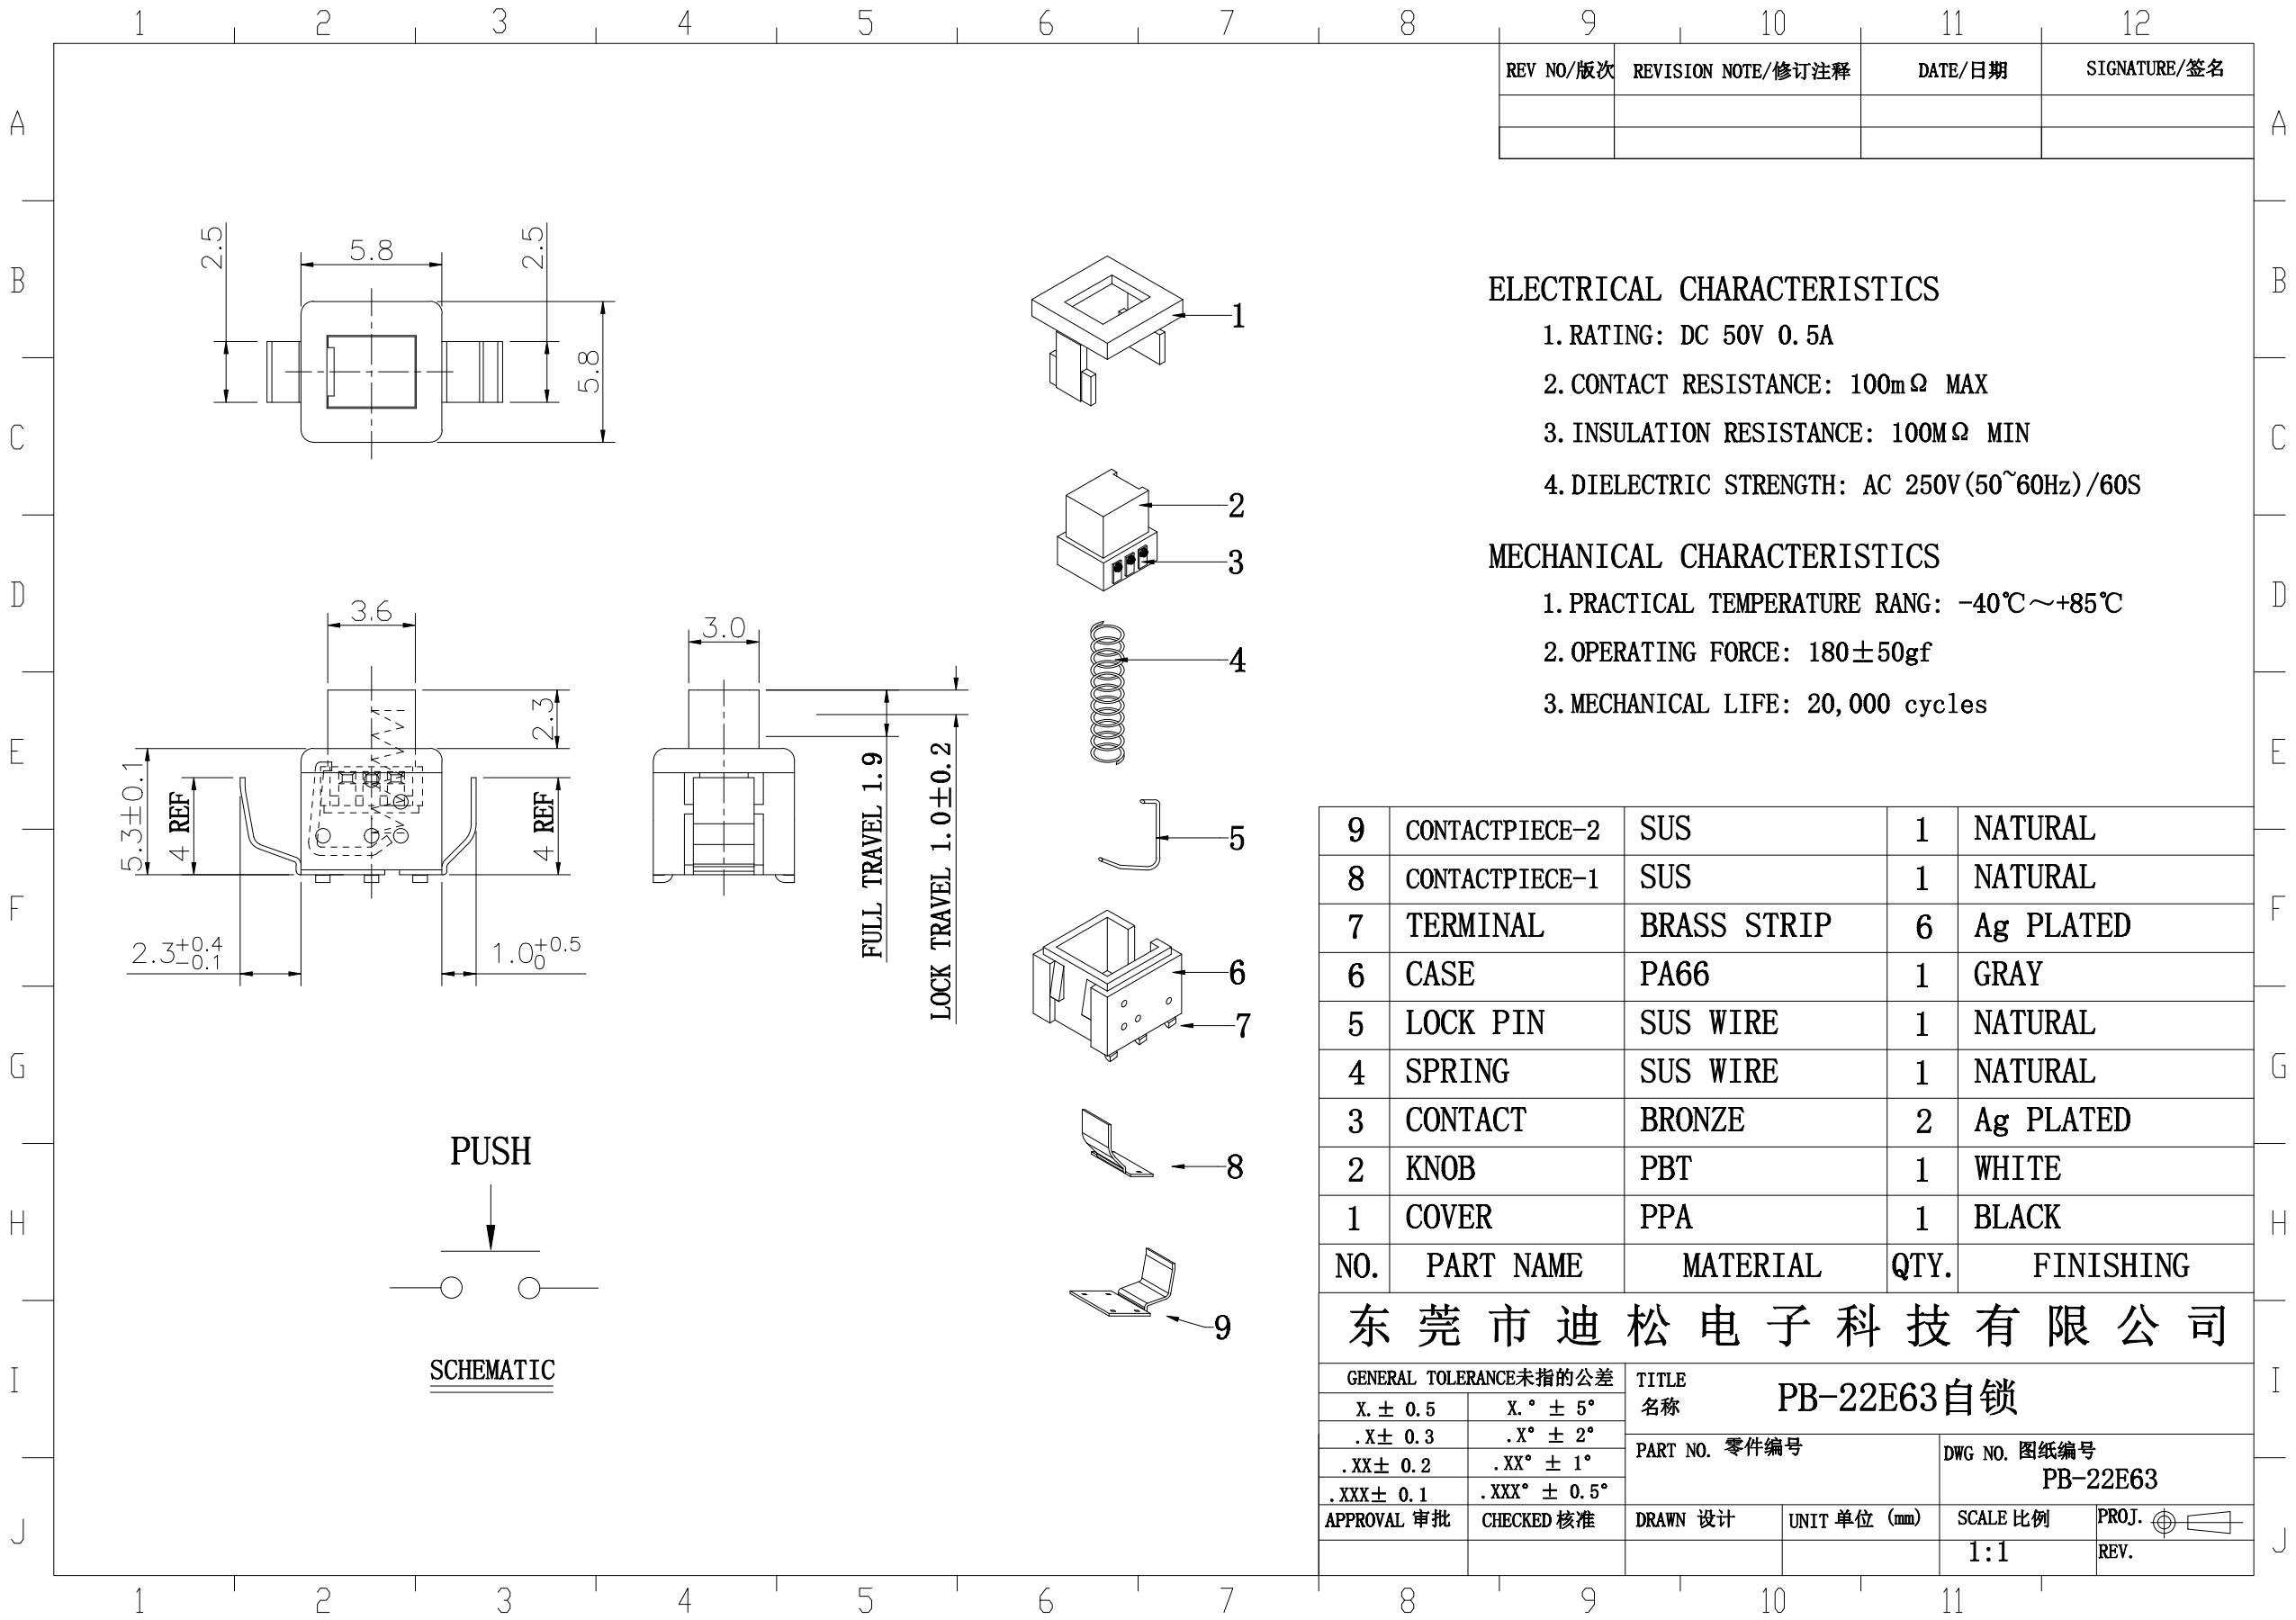

ELECTRICAL CHARACTERISTICS

- 1. RATING: DC 50V 0.5A
- 2. CONTACT RESISTANCE: 100mΩ MAX
- 3. INSULATION RESISTANCE: 100MΩ MIN
- 4. DIELECTRIC STRENGTH: AC 250V (50~60Hz)/60S

MECHANICAL CHARACTERISTICS

- 1. PRACTICAL TEMPERATURE RANG: -40℃~+85℃
- 2. OPERATING FORCE: 180±50gf
- 3. MECHANICAL LIFE: 20,000 cycles

9	CONTACTPIECE-2	SUS	1	NATURAL
8	CONTACTPIECE-1	SUS	1	NATURAL
7	TERMINAL	BRASS STRIP	6	Ag PLATED
6	CASE	PA66	1	GRAY
5	LOCK PIN	SUS WIRE	1	NATURAL
4	SPRING	SUS WIRE	1	NATURAL
3	CONTACT	BRONZE	2	Ag PLATED
2	KNOB	PBT	1	WHITE
1	COVER	PPA	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING

东莞市迪松电子科技有限公司

GENERAL TOLERANCE未指的公差		TITLE 名称 PB-22E63自锁		
X. ± 0.5	X. ° ± 5°			
.X ± 0.3	.X° ± 2°			
.XX ± 0.2	.XX° ± 1°			
.XXX ± 0.1	.XXX° ± 0.5°			
APPROVAL 审批	CHECKED 核准	DRAWN 设计	UNIT 单位 (mm)	DWG NO. 图纸编号 PB-22E63
				SCALE 比例 1:1
				PROJ.  REV.