


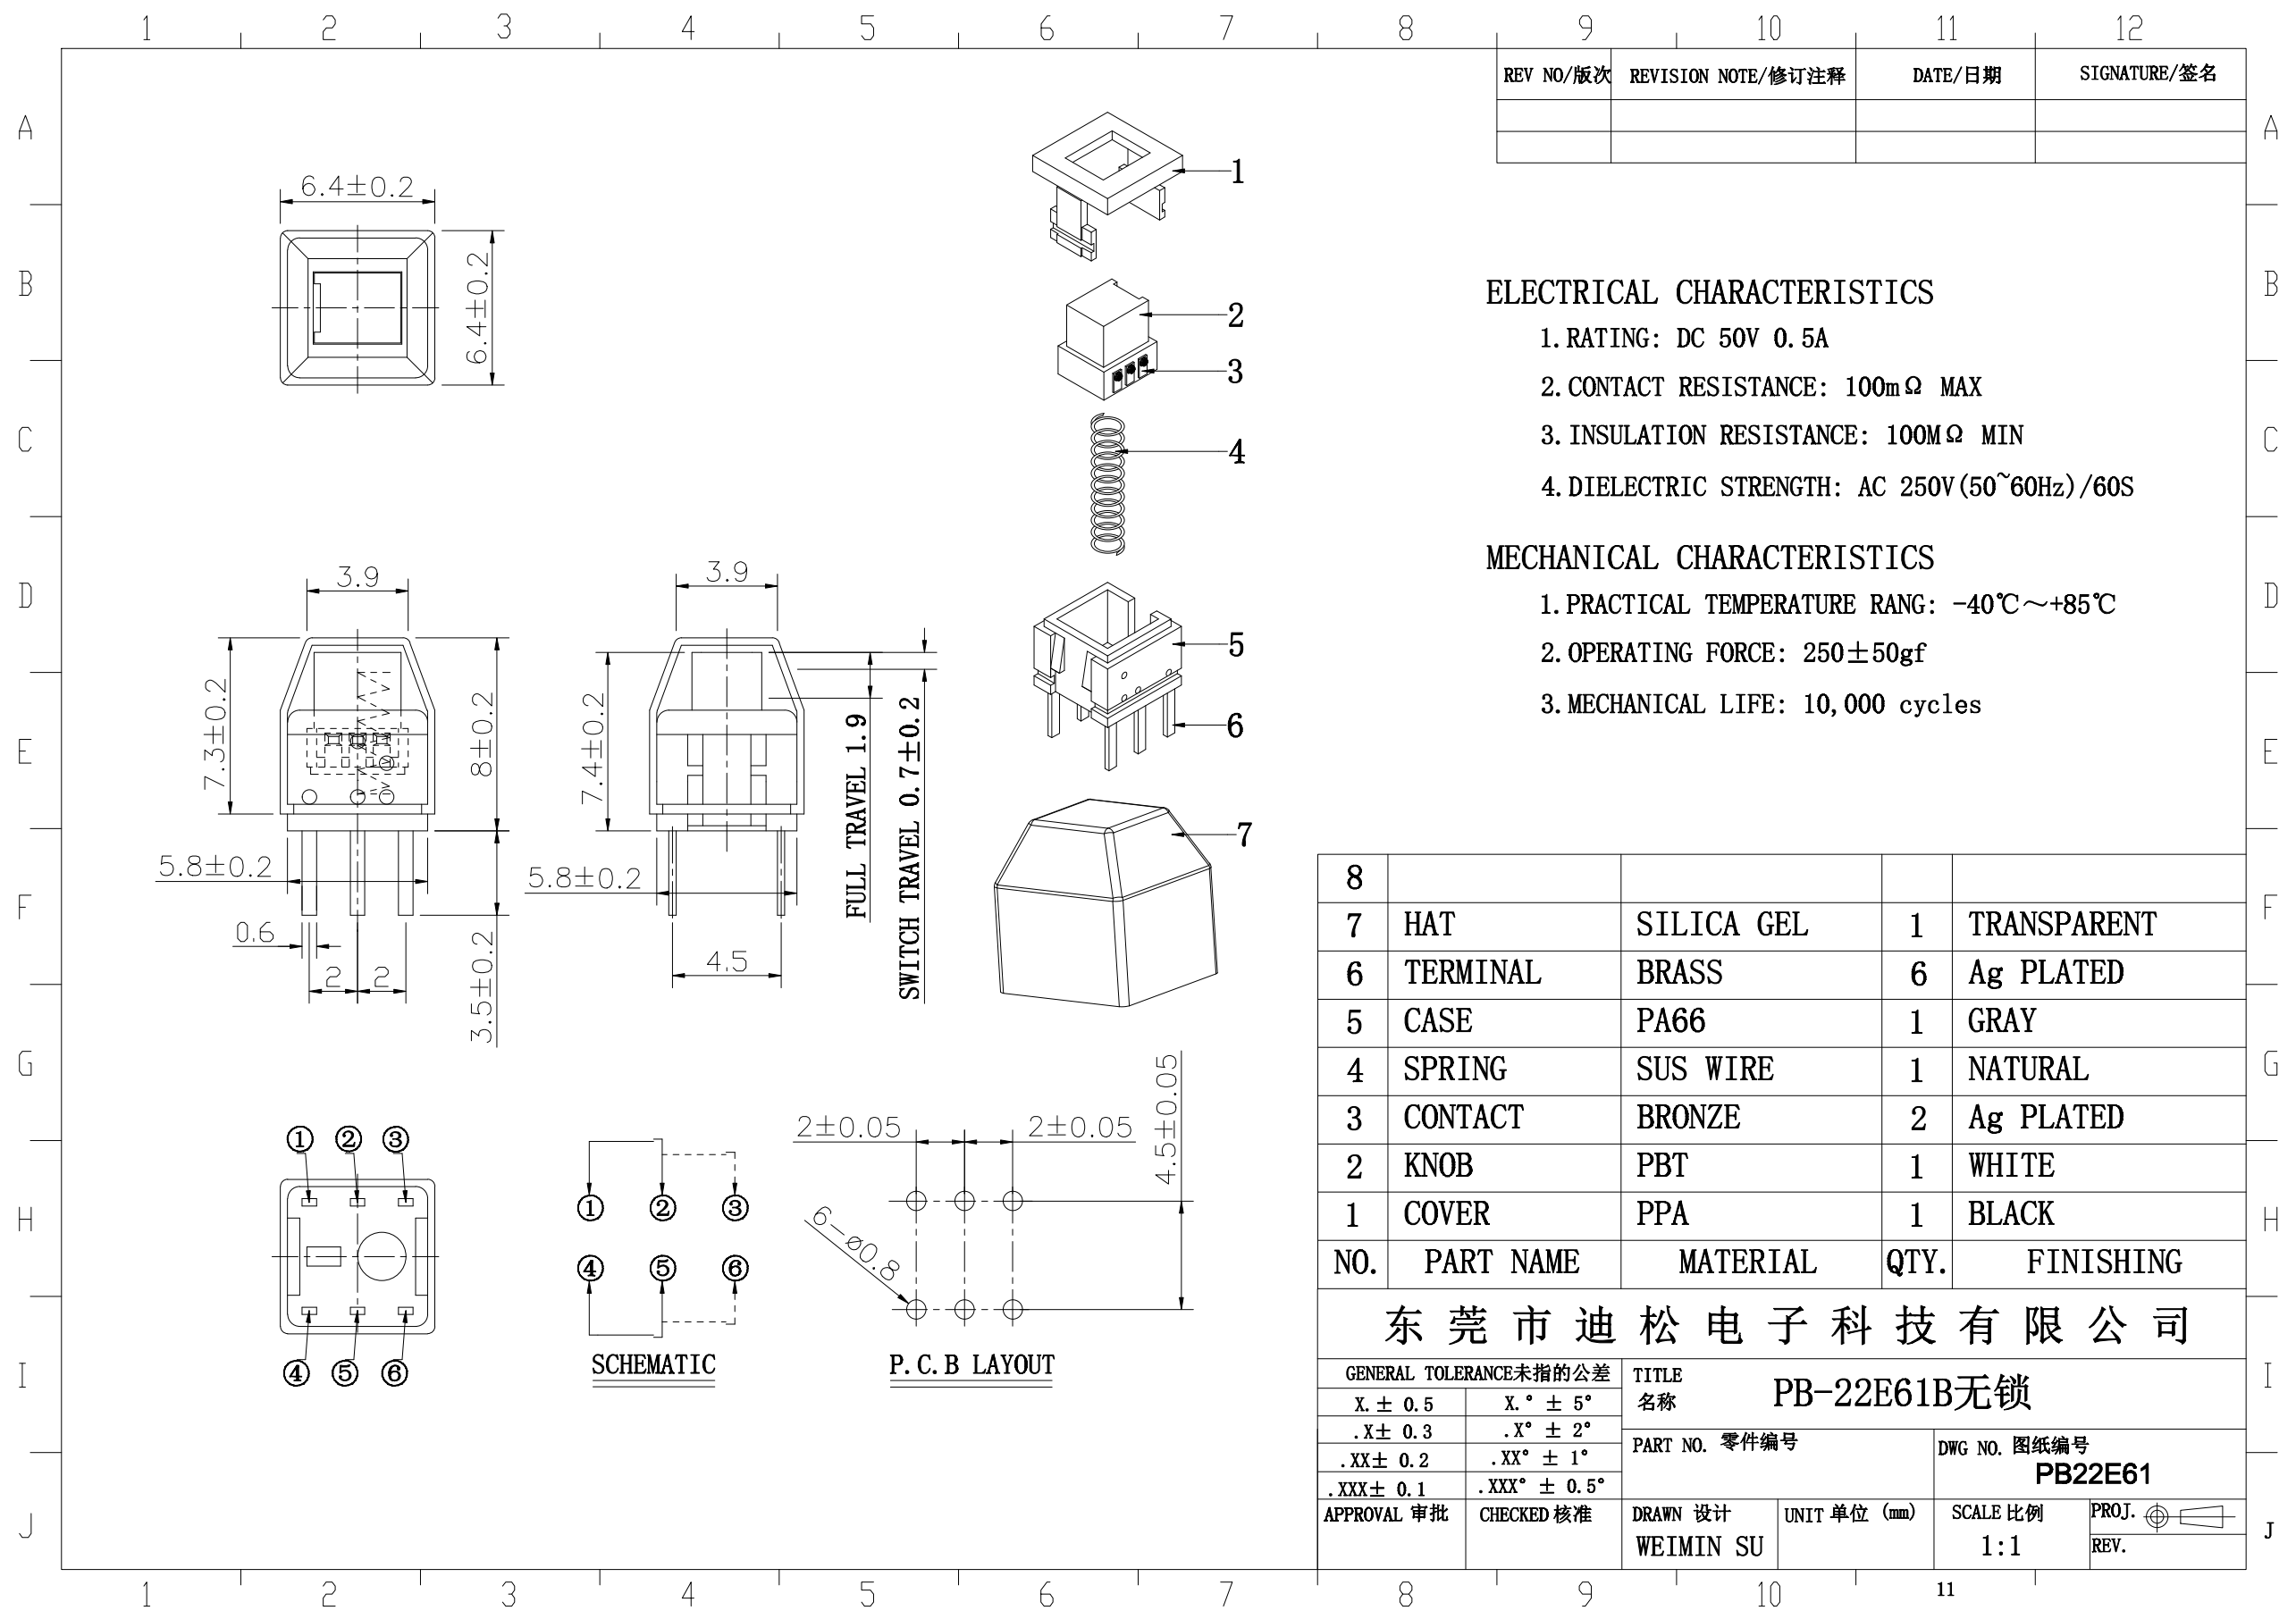

REV NO/版次	REVISION NOTE/修订注释	DATE/日期	SIGNATURE/签名

- ELECTRICAL CHARACTERISTICS**
- 1. RATING: DC 50V 0.5A
 - 2. CONTACT RESISTANCE: 100mΩ MAX
 - 3. INSULATION RESISTANCE: 100MΩ MIN
 - 4. DIELECTRIC STRENGTH: AC 250V (50~60Hz)/60S

- MECHANICAL CHARACTERISTICS**
- 1. PRACTICAL TEMPERATURE RANG: -40℃~+85℃
 - 2. OPERATING FORCE: 250±50gf
 - 3. MECHANICAL LIFE: 10,000 cycles

NO.	PART NAME	MATERIAL	QTY.	FINISHING
8				
7	HAT	SILICA GEL	1	TRANSPARENT
6	TERMINAL	BRASS	6	Ag PLATED
5	CASE	PA66	1	GRAY
4	SPRING	SUS WIRE	1	NATURAL
3	CONTACT	BRONZE	2	Ag PLATED
2	KNOB	PBT	1	WHITE
1	COVER	PPA	1	BLACK

东莞市迪松电子科技有限公司				
GENERAL TOLERANCE未指的公差		TITLE 名称		
X. ± 0.5	X. ° ± 5°	PB-22E61B无锁		
.X ± 0.3	.X ° ± 2°	PART NO. 零件编号		DWG NO. 图纸编号
.XX ± 0.2	.XX ° ± 1°			PB22E61
.XXX ± 0.1	.XXX ° ± 0.5°			
APPROVAL 审批	CHECKED 核准	DRAWN 设计	UNIT 单位 (mm)	SCALE 比例
		WEIMIN SU		1:1
				PROJ. 项目
				REV. 修订