


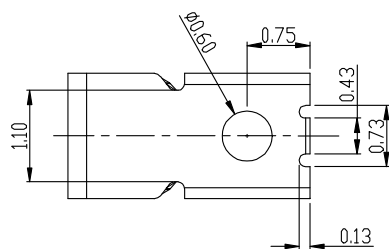

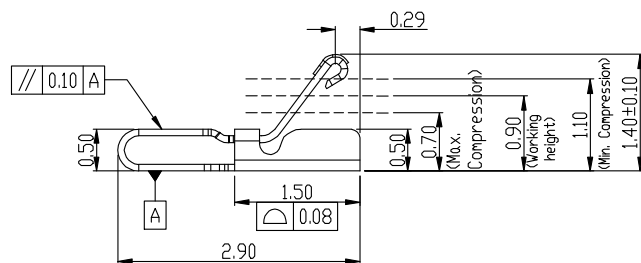


Rev.	ECN Number	Description	Date	Drawn	Checkd	Approved

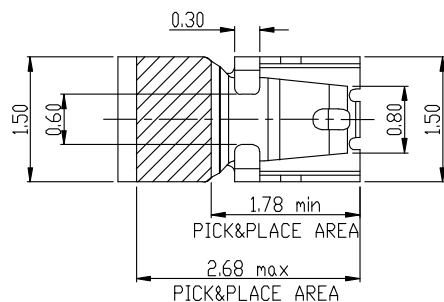

State at
working height 0.9mm

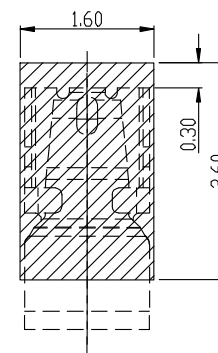

NOTES:

1:MATERIAL:

1-1: STAINLESS STEEL,T=0.08mm.

2:FINISH:

2-1: 3u" MIN. Au PLATING ON CONTACT AREA,
GOLD FLASH PLATING ON SOLDER AREA,
50~150u" NICKEL UNDERPLATING OVER ALL.

3:SPECIFICATIONS:

3-1.CONTACT RESISTANCE:50mΩ MAX.

3-2.OPERATING TEMPERATURE: -20℃~+65℃.

3-3.PRE-LOAD FORCE:0.35N ON CONTACT POINT.

3-4.FORCE MAX. DEFLECTION:0.60N ON CONTACT POINT.

3-5.MAX.BEAM DEFLECTION:0.50mm. ON CONTACT POINT.

4:RF PERFORMANCE:

4-1.IMPEDANCE:50ΩHM.

4-2.VSWR: 1.5MAX.(DC~3GHz)

4-3.INSERTION LOSS: 0.6dBMAX.(DC~3GHz)

5:DURABILITY: 100 CYCLES.

6.PACKING SPECIFICATION:REEL&TAPE

DISONG

GENERAL TOLERANCE

XX. ±0.50	
X. ±0.35	X.* ±2.0°
.X ±0.25	.X.* ±1.0°
.XX ±0.15	.XX.* ±0.5°

SCALE:

1:1

UNIT:

mm

SIZE:

A4



DRAWN

Chen

DATE

2013. 4. 03

CHECK

DATE

APPROVE

DATE

DWG. NO.

PARTS NO.(INTENDED USE)

AS-011

TITLE

RF Antenna Spring,SMT,
L2.9*W1.5*H1.4mm

REV.

A

SHEET

1/2