








Rev.	ECN Number	Description	Date	Drawn	Checked	Approved



RECOMMENDED PCB LAYOUT
TOLERANCE ±0.05MM

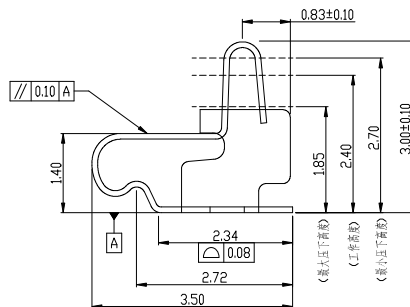

技术要求:

1: 材质: SUS304, 厚度0.1mm,

2: 表面处理:

整体镀镍50U'', 镀金1U''

3: 性能:

3-1. 接触电阻: 50mΩ MAX.

3-2. 使用温度: -20° C~+65° C.

3-3. 预压弹力: 0.35N.

3-4. 工作高度位置弹力: 0.8N.

4: 压延毛边<0.05mm.

5: 寿命: >10000次

6: 包装方式: 载带胶盘包装

DISONG

GENERAL TOLERANCE

XX. ±0.50	
X. ±0.35	X* ±2.0°
.X ±0.25	.X* ±1.0°
.XX ±0.15	.XX* ±0.5°

SCALE: 1:1

UNIT: mm

SIZE: A4

DRAWN

CHECK

APPROVE

DATE

DATE

DATE

DWG. NO.

PARTS NO.(INTENDED USE)

AS-002A

TITLE

(CUSTOMER DRAWING)

RF Antenna Spring,SMT,
L3.5*W1.5*H3.0mm

REV.

A

SHEET

1/1