


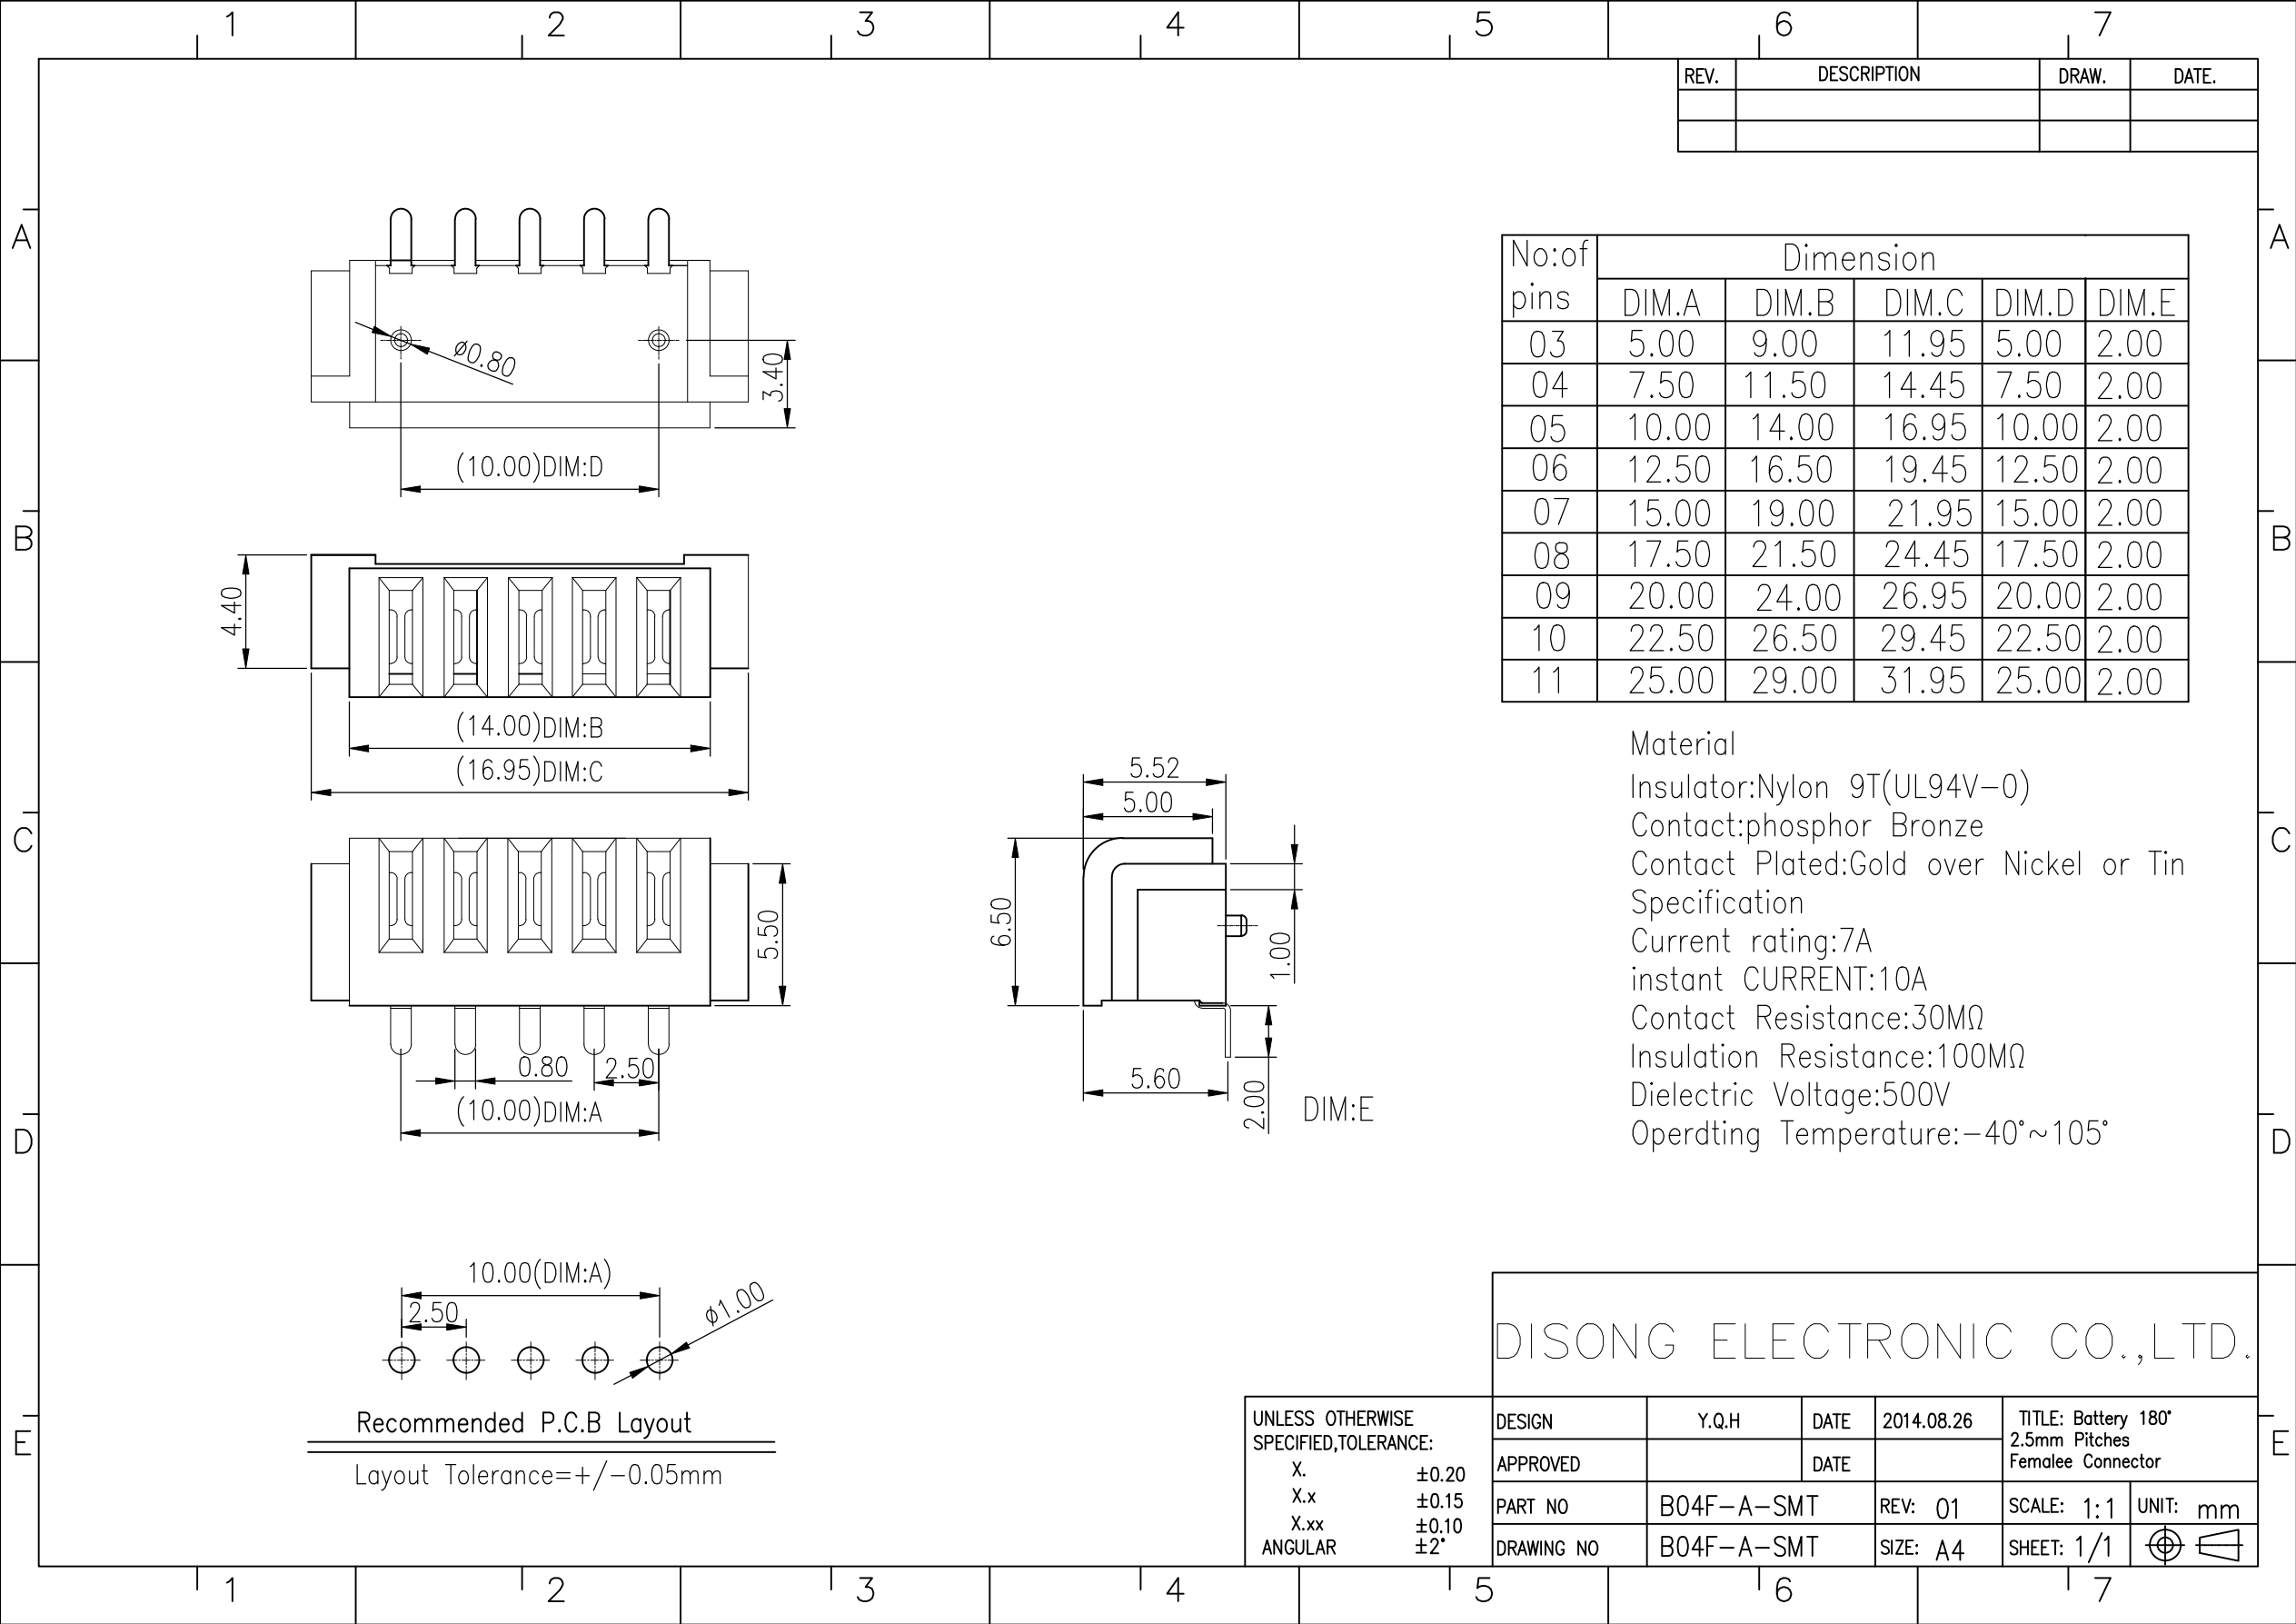

REV.	DESCRIPTION	DRAW.	DATE.

No:of pins	Dimension				
	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E
03	5.00	9.00	11.95	5.00	2.00
04	7.50	11.50	14.45	7.50	2.00
05	10.00	14.00	16.95	10.00	2.00
06	12.50	16.50	19.45	12.50	2.00
07	15.00	19.00	21.95	15.00	2.00
08	17.50	21.50	24.45	17.50	2.00
09	20.00	24.00	26.95	20.00	2.00
10	22.50	26.50	29.45	22.50	2.00
11	25.00	29.00	31.95	25.00	2.00

Material
Insulator:Nylon 9T(UL94V-0)
Contact:phosphor Bronze
Contact Plated:Gold over Nickel or Tin
Specification
Current rating:7A
instant CURRENT:10A
Contact Resistance:30M Ω
Insulation Resistance:100M Ω
Dielectric Voltage:500V
Operdting Temperature:-40 $^{\circ}$ ~105 $^{\circ}$

DISONG ELECTRONIC CO.,LTD.					
DESIGN	Y.Q.H	DATE	2014.08.26	TITLE: Battery 180 $^{\circ}$ 2.5mm Pitches Female Connector	
APPROVED		DATE			
PART NO	B04F-A-SMT	REV:	01	SCALE: 1:1	UNIT: mm
DRAWING NO	B04F-A-SMT	SIZE: A4	SHEET: 1/1		

UNLESS OTHERWISE SPECIFIED,TOLERANCE:	
X.	± 0.20
X.x	± 0.15
X.xx	± 0.10
ANGULAR	$\pm 2^{\circ}$