

REV.	DESCRIPTION	DRAW.	DATE.
01	NEW DESIGN	Eih	2016.05.28





No:of pins	Dimension		
	DIM.A	DIM.B	DIM.C
03	14.50	7.50	11.50
04	17.00	10.00	14.00
05	19.50	12.50	16.50
06	22.00	15.00	19.00
07	24.50	17.50	21.50
08	27.00	20.00	24.00
09	29.50	22.50	26.50

NOTE:

- MATERIAL:
 - HOUSING: PA9T, UL 94V-0
 - TERMINAL: C2680
- FINISH:
 - Plated: Gold over Nickel or Tin
- PRODUCT SPECIFICATION
 - CURRENT RATING :7A
 - VOLTAGE RATING : 125V AC
 - DIELECTRIC WITHSTANDING VOLTAGE:500VAC
 - INSULATION RESISTANCE: 100MΩ min.
 - CONTACT RESISTANCE: 30mΩ Max.
 - Operating Temperature: -40° ~105°

DISONG ELECTRONIC CO., LTD.

UNLESS OTHERWISE SPECIFIED, TOLERANCE: X. ±0.30 X.x ±0.20 X.xx ±0.15 ANGULAR ±2°	DESIGN	Eih	DATE	2016.05.28	TITLE: Battery 90° 2.5mm Pitches	
	APPROVED		DATE		Male Connector	
	PART NO	B10M-A-R10-C		REV: 01	SCALE: 1:1	UNIT: mm
	DRAWING NO	B10M-A-R10-C		SIZE: A4	SHEET: 1/1	

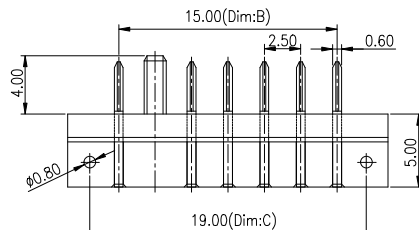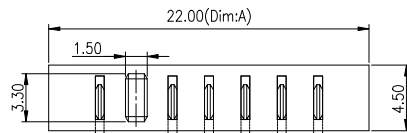

Recommended P.C.B Layout

Layout Tolerance = $\pm 0.05\text{mm}$