


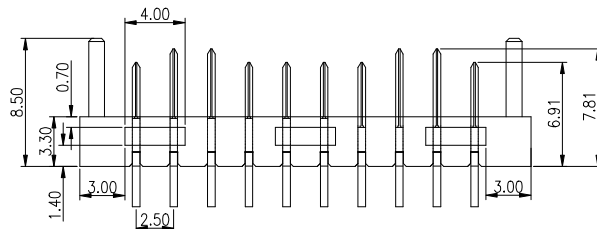


| REV. | DESCRIPTION | DRAW. | DATE.      |
|------|-------------|-------|------------|
| 01   | NEW DESIGN  | Elih  | 2016.04.07 |

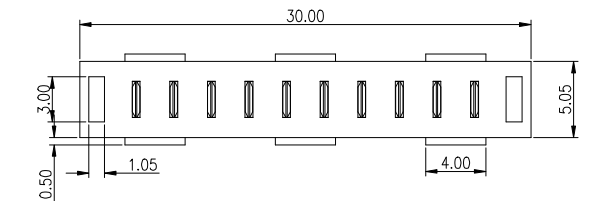

Recommended P.C.B Layout

Layout Tolerance=+/-0.05mm

Material

Insulator:Nylon 9T(UL94V-0)

TERMINAL:phosphor Bronze

TERMINAL Plated:Gold over Nickel or Tin

Specification

Current rating:7A

instant CURRENT:10A

Contact Resistance:30mΩ

Insulation Resistance:100MΩ

Dielectric Voltage:500V

Operdting Temperature:-40°~105°

DISONG ELECTRONIC CO.,LTD.

|                                                                                             |            |             |         |            |                     |
|---------------------------------------------------------------------------------------------|------------|-------------|---------|------------|---------------------|
| UNLESS OTHERWISE SPECIFIED,TOLERANCE:<br>X. ±0.50<br>X.x ±0.30<br>X.xx ±0.20<br>ANGULAR ±2° | DESIGN     |             | DATE    |            | TITLE: Battery 180° |
|                                                                                             | APPROVED   |             | DATE    |            | 2.5mm Pitches       |
|                                                                                             | PART NO    | B28M-10P-R1 | REV: 01 | SCALE: 1:1 | Male Connector      |
|                                                                                             | DRAWING NO | B28M-10P-R1 | SIZE:   | SHEET:     | UNIT: mm            |

