

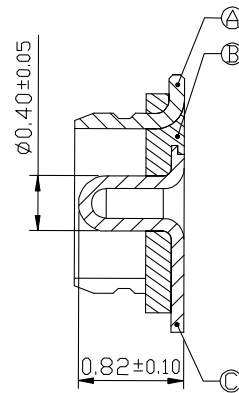
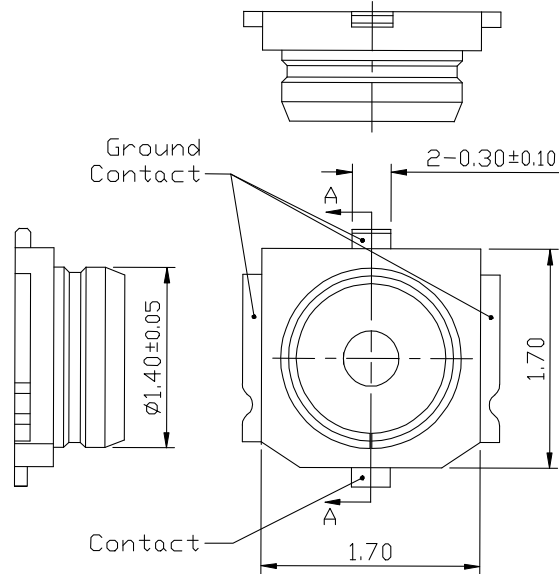
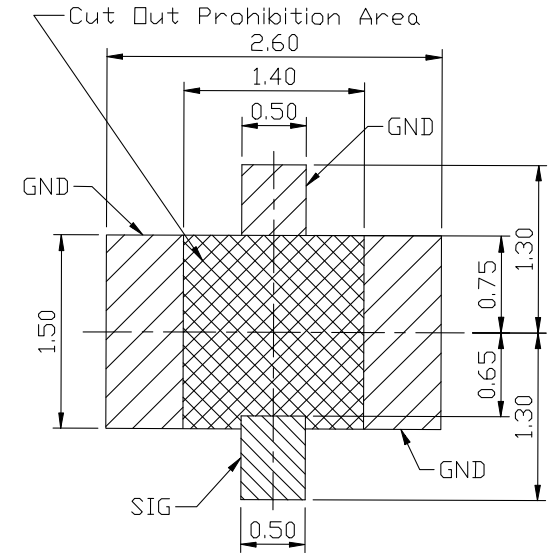


Rev.	ECN	Number	Description	Date	Drawn	Checkd	Approved



Section A-A
Scale 1:1

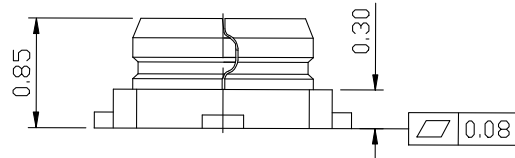

RECOMMENDED P.C.B. LAYOUT
TOP VIEW(TOLERANCE:±0.05)

NOTES:

- 1.1 Rated Voltage 60V AC
- 1.2 Frequency Range 0 ~ 6GHz
- 1.3 Impedance 50Ω
- 1.4 Operating Temperature -40 ℃ ~ 90 ℃
- 2.1 Voltage Standing Wave Ratio(VSWR)
 - 1.3 max. at 0 ~ 6GHz
 - 1.4 max. at 3 ~ 6GHz
- 2.2 Durability 30 cycles
- 3.1 Packing taPe & reel 1500Pcs/Reel (Φ78mm)

RF-003	C	CONTACT	1	COPPER ALLOY/GOLD PLATED OVER Ni
	B	HOUSING	1	High Temp. Plastic UL94V-0/BLACK
	A	SHELL	1	COPPER ALLOY/Au PLATED OVER Ni
	ITEM	PART NAME	Q'TY	MATERIAL/FINISH
PROD. NO.	BOM LIST			

DISONG	GENERAL TOLERANCE		SCALE: 1:1	DRAWN	DATE	DWG. NO.	TITLE	REV. A		
	XX. ±0.50		UNIT: mm	CHECK	DATE					
	X. ±0.35	X.° ±2.0°		APPROVE	DATE					
	.X ±0.25	.X° ±1.0°								
	.XX ±0.15	.XX° ±0.5°								
SIZE: A4				PARTS NO.(INTENDED USE)				Ultra Small Surface Mount Coaxial CONN.	SHEET	
					RF-003				USS RF SERIES	1/1