

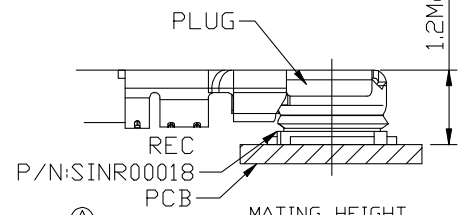






Rev.	ECN Number	Description	Date	Drawn	Checkd	Approved



MATING HEIGHT
SCALE 1:2

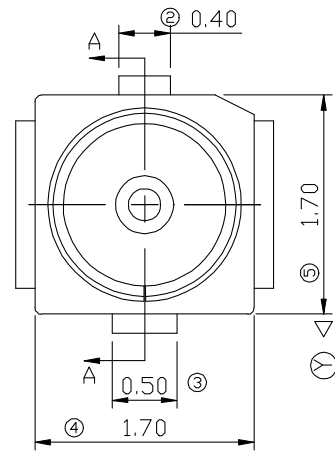

SECTION A-A
SCALE 1:1

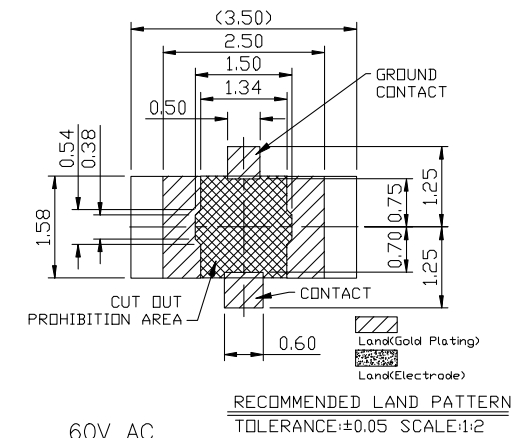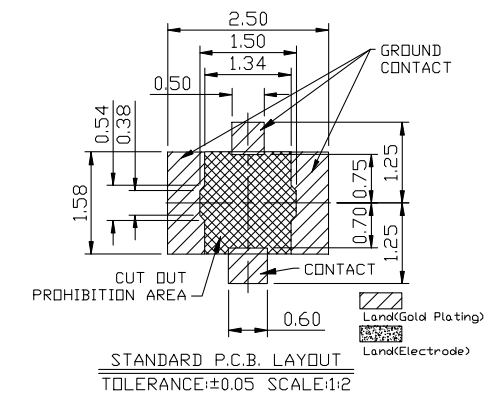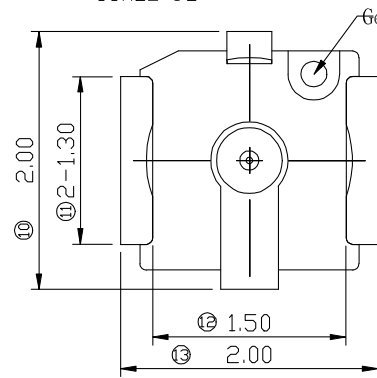

Notes:

- 1.1 Rated Voltage 60V AC
- 1.2 Frequency Range 0~6GHz
- 1.3 Impedance 50W
- 1.4 Operating Temperature -40℃~+90℃
- 2.1 Voltage Standing Wave Ratio(VSWR) 1.4 max. at 3~6GHz
- 1.3 max. at 0~3GHz
- 2.2 Durability 30 cycles

RF-004-0.6H	C	CONTACT	1	COPPER ALLOY/GOLD PLATED OVER Ni
	B	HOUSING	1	High Temp. Plastic UL94V-0/BLACK
	A	SHELL	1	COPPER ALLOY/Au PLATED OVER Ni
	ITEM	PART NAME	Q'TY	MATERIAL/FINISH
PROD. NO.	BOM LIST			

DISONG	GENERAL TOLERANCE		SCALE: 1:1	DRAWN	DATE	DWG. NO.	TITLE	REV.
	XX. ±0.50		UNIT: mm	CHECK	DATE			CUSTOMER DRAWING
	X. ±0.35	X.° ±2.0°		CHECK	DATE	USS RF REC CONN,4代,H0.6	SHEET	
	.X ±0.25	.X° ±1.0°		APPROVE	DATE	PARTS NO.(INTENDED USE)	USS RF SERIES	1/1
	.XX ±0.15	.XX° ±0.5°	SIZE: A4			RF-004-0.6H		