



RoHS
Compliant

SYMBOL	REVISION	APPROVAL	DATE



备注:

1. 产品规格:

1-1. 额定电压:30V

1-2. 耐电压:1000V AC MIN.

1-3. 接触阻抗:30mΩ MAX. INITIAL;40mΩ MAX
AFTER 3000 CYCLES

1-4. 绝缘电阻:1000MΩ MIN





1-5. 工作温度:-25°C TO +80°C

2. 材质:

2. 1胶芯: PA9T UL94V-0/LCP BLACK

2. 2端子: 合金铜, 锡底, GOLD

3. 所用材质须符合RoHS要求

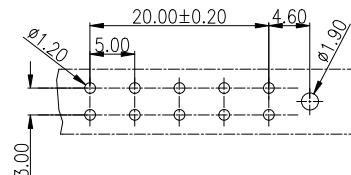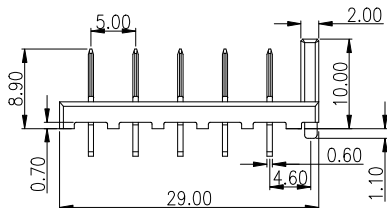

RECOMMENDED P.C. BOARD LAYOUT

DISONG ELECTRONIC CO., LTD.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME	CONNECTOR		DRAWING	M.M.Zhang	DWG.No.	JD-009
PART NO.	C01M-A-5P-R2		CHECK	G.C.Chen	REV.	A1
	UNIT : mm	TOLERANCE OTHERWISE	UP TO 5 ±0.2	APPROVAL	DATE	01-07-2016
			ABOVE 5 TO 30 ±0.5			
		OTHERWISE	ABOVE 30 ±0.5	SCALE	PAGE	1 OF 1
			ANGLE 0°±3°			