

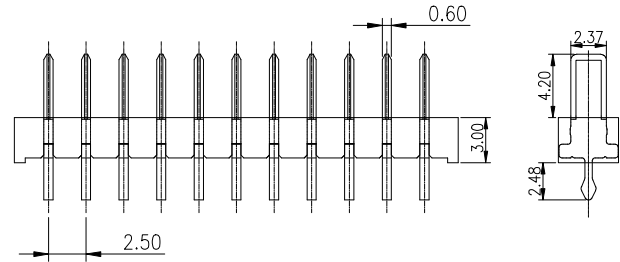


REV.	DESCRIPTION	DRAW.	DATE.
01	NEW DESIGN	EliH	2016.04.07

No. of Pins	Dimension	
	DIM.B	DIM.A
03	5.00	9.50
04	7.50	12.00
05	10.00	14.50
06	12.50	17.00
07	15.00	19.50
08	17.50	22.00
09	20.00	24.50
10	22.50	27.00
11	25.00	29.50

Material
 Insulator:Nylon 9T(UL94V-0)
 TERMINAL:phosphor Bronze
 TERMINAL Plated:Gold over Nickel or Tin
 Specification
 Current rating:7A
 instant CURRENT:10A
 Contact Resistance:30mΩ
 Insulation Resistance:100MΩ
 Dielectric Voltage:500V
 Operdting Temperature:-40°~105°

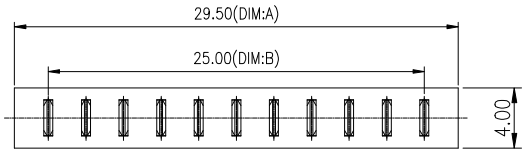

Recommended P.C.B Layout
 Layout Tolerance=+/-0.05mm

DISONG ELECTRONIC CO.,LTD.

UNLESS OTHERWISE SPECIFIED,TOLERANCE:	DESIGN	DATE	TITLE
X	APPROVED	DATE	Battery 180°
X.x			2.5mm Pitches
X.xx	PART NO	REV: 01	Male Connector
ANGULAR ±2°	DRAWING NO	SIZE: A4	SCALE: 1:1
			UNIT: mm
			SHEET: 1/1

