
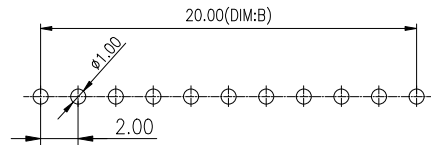

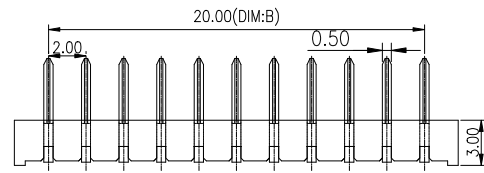


REV.	DESCRIPTION	DRAW.	DATE.
01	NEW DESIGN	Elih	2016.05.05

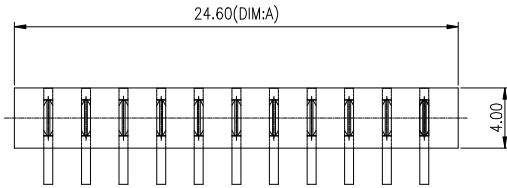

Recommended P.C.B Layout
Layout Tolerance = $\pm 0.05\text{mm}$

No. of Pins	Dimension	
	DIM.B	DIM.A
03	4.00	8.60
04	6.00	10.60
05	8.00	12.60
06	10.00	14.60
07	12.00	16.60
08	14.00	18.60
09	16.00	20.60
10	18.00	22.60
11	20.00	24.60

Material
 Insulator: Nylon 9T(UL94V-0)
 TERMINAL: phosphor Bronze
 TERMINAL: Plated Gold over Nickel or Tin
 Specification
 Current rating: 5A
 instant CURRENT: 7A
 Contact Resistance: 30mΩ
 Insulation Resistance: 100MΩ
 Dielectric Voltage: 500V
 Operating Temperature: -40°~105°

DISONG ELECTRONIC CO.,LTD.

UNLESS OTHERWISE SPECIFIED, TOLERANCE: X ±0.50 X.x ±0.30 X.xx ±0.20 ANGULAR ±2°	DESIGN	DATE	TITLE	Battery 90° 2.0mm Pitches Male Connector
	APPROVED	DATE	REV: 01	SCALE: 1:1
PART NO	DS-A11M-A-R4	REV: 01	SCALE: 1:1	UNIT: mm
DRAWING NO	DS-A11M-A-R4	SIZE: A4	SHEET: 1/1	